


防水接头系列-塑料电缆接头

Waterproof connector series-Plastic cable connector

技术参数 Technical parameters

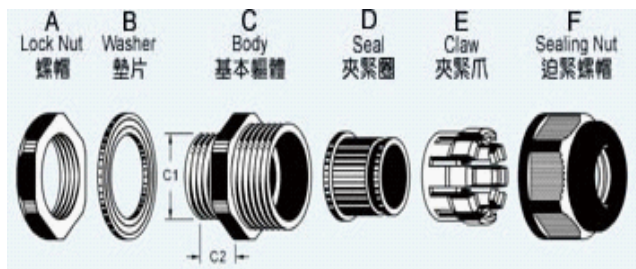

材质 Material	尼龙 PA66
夹紧件 Fastener	尼龙 PA66
O-密封圈 O seal ring	三元一丙 EPDM
防护等级 Protection grade	IP68-10Bar
环境温度 Ambient temperature	-40°C - 100°C / 120°C

产品系列 Product series

产品编码 Part number	螺纹规格 Thread specification	适用电缆 The application of cable	螺纹外径 C1 Thread diameter	螺纹长度 G2 Length of thread	板手 Wrench
HSK-M12	M12×1.5	4-7	12	8.5	18/19
HSK-M16	M16×1.5	6-10	16	15.0	22/22
HSK-M20	M20×1.5	8.5-14	20	15.0	27/27
HSK-M25	M25×1.5	12.5-18	25	15.0	33/33
HSK-M32	M32×1.5	18-25	32	15.0	41/41
HSK-M40	M40×1.5	24-32	40	15.0	50/50
HSK-M50	M50×1.5	31-41	50	20.0	62/62
HSK-M63	M63×1.5	38-46	63	20.0	75/75
HSK-PG7	PG7	4-7	12.5	8.5	17/19
HSK-PG9	PG9	4.5-8	15.2	8.5	22/19
HSK-PG11	PG11	6-10	18.6	9.0	24/22
HSK-PG13	PG13.5	7-12.5	20.4	10.0	27/24
HSK-PG16	PG16	8.5-14	22.5	10.0	30/27
HSK-PG21	PG21	12.5-18	28.3	12.0	36/33
HSK-PG29	PG29	18-25	37	15.0	46/41
HSK-PG36	PG36	24-32	47	15.0	57/50
HSK-PG42	PG42	31-41	54	15.5	64/62
HSK-PG48	PG48	35-45	59.3	15.5	70/65

防水接头系列-塑料电缆接头（防折）

Waterproof connector series-Plastic cable connector（folding proof）

技术参数 Technical parameters



材质 Material	尼龙 PA66
夹紧件 Fastener	尼龙 PA66
O-密封圈 O seal ring	三元一丙 EPDM
防护等级 Protection grade	IP68-10Bar
环境温度 Ambient temperature	-40°C- 100°C / 120°C

产品系列 Product series

产品编码 Part number	螺纹规格 Thread specification	适用电缆 The application of cable	螺纹外径 C1 Thread diameter	螺纹长度 G2 Length of thread	板手 Wrench
M12	M12×1.5	3-5.5	12	8.5	18/19
M12	M12×1.5	4.5-8	12	8.5	18/19
M16	M16×1.5	4-7	16	15.0	22/22
M16	M16×1.5	6-10	16	15.0	22/22
M20	M20×1.5	6-11	20	15.0	27/27
M20	M20×1.5	8.5-14	20	15.0	27/27
M25	M25×1.5	10-16	25	15.0	33/33
M25	M25×1.5	12.5-18	25	15.0	33/33
PG7	PG7	3-6.5	12.5	8.5	17/19
PG7	PG7	4-7	12.5	8.5	17/19
PG9	PG9	4.5-8	15.2	8.5	22/19
PG11	PG11	6-10	18.6	10.0	24/22
PG13.5	PG13.5	7-12.5	20.4	10.0	27/24
PG16	PG16	8.5-14	22.5	10.0	30/27
PG21	PG21	12.5-18	28.3	12.0	36/33